

122 ton·meter loopkatkraan op rupsonderstel

Potain GTMR 366 A

Algemene gegevens


Eigen gewicht
83 ton

Draaicirkel ballast
4,08 m

Rijbreedte
5,90 m

Gronddruk
0,85 kg/cm²

Generator
75 KVA

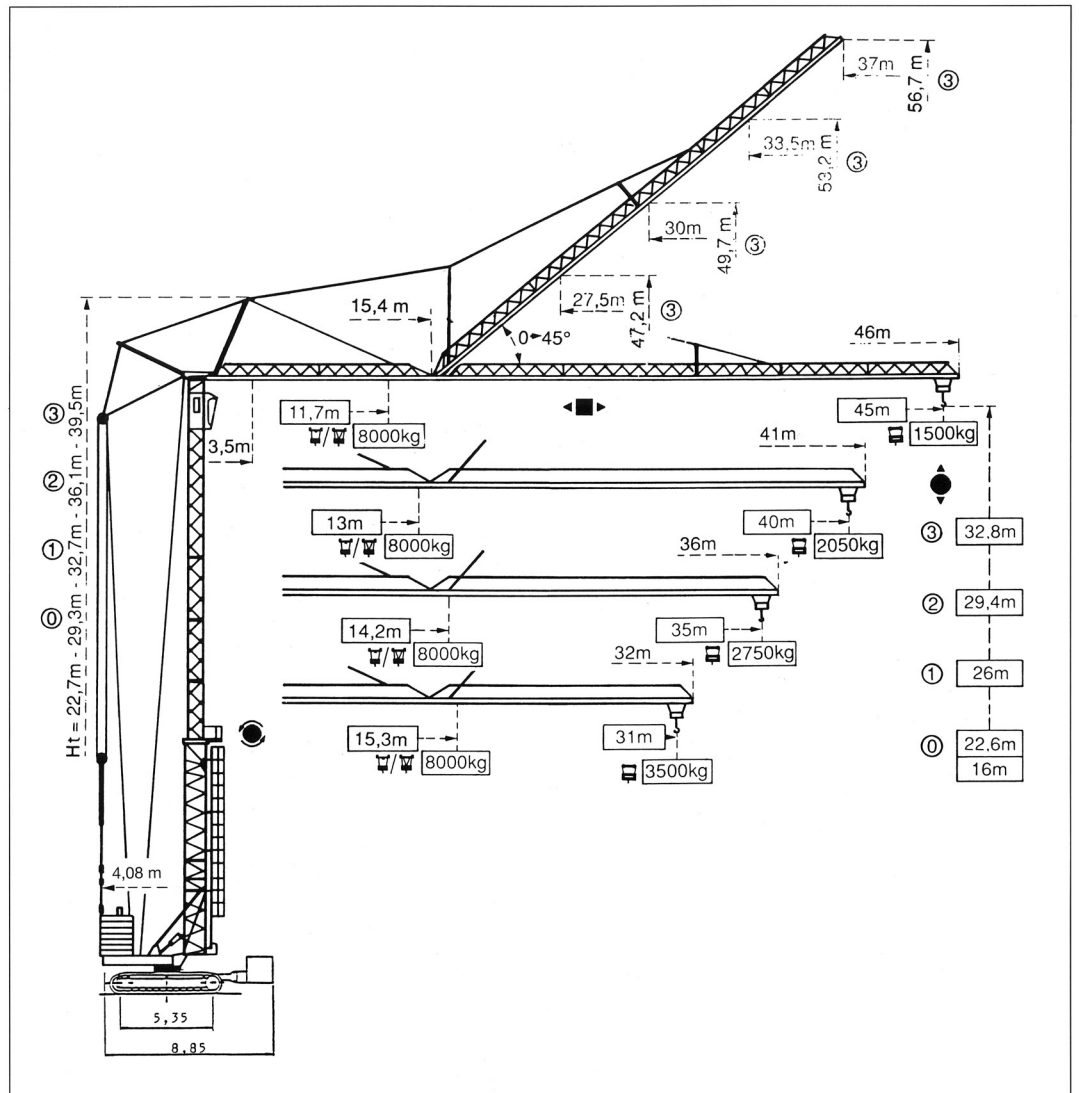


Heftabel




Gieklengte

| | | | | | | | | | | | | | | | | | | |
|-------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|----|
| 3,5 → | 11,7 | 15 | 17 | 19 | 21 | 23 | 25 | 27 | 29 | 31 | 33 | 35 | 37 | 38 | 40 | 42 | 45 | m |
| ♣/♣ | 8000 | 5780 | 4920 | 4260 | 3740 | 3320 | 2980 | 2690 | 2440 | 2230 | 2050 | 1880 | 1740 | 1680 | 1550 | 1440 | 1300 | kg |




| | | | | | | | | | | | | | | | |
|-------|-----|------|------|------|------|------|------|------|------|------|------|------|------|------|----|
| 45m → | 3,5 | 20,7 | 23 | 25 | 27 | 29 | 31 | 33 | 35 | 37 | 38 | 40 | 42 | 45 | m |
| ♣ | | 4000 | 3520 | 3180 | 2890 | 2640 | 2430 | 2250 | 2080 | 1940 | 1880 | 1750 | 1640 | 1500 | kg |

| | | | | | | | | | | | | | | | | |
|-------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|----|
| 3,5 → | 13 | 15 | 17 | 19 | 21 | 23 | 25 | 27 | 29 | 31 | 33 | 35 | 37 | 38 | 40 | m |
| ♣/♣ | 8000 | 6650 | 5670 | 4930 | 4340 | 3860 | 3470 | 3140 | 2860 | 2620 | 2410 | 2230 | 2060 | 1990 | 1850 | kg |




| | | | | | | | | | | | | |
|-------|-----|------|------|------|------|------|------|------|------|------|------|----|
| 40m → | 3,5 | 23,3 | 25 | 27 | 29 | 31 | 33 | 35 | 37 | 38 | 40 | m |
| ♣ | | 4000 | 3670 | 3340 | 3060 | 2820 | 2610 | 2430 | 2260 | 2190 | 2050 | kg |

| | | | | | | | | | | | | | |
|-------|------|------|------|------|------|------|------|------|------|------|------|------|----|
| 3,5 → | 14,2 | 15 | 17 | 19 | 21 | 23 | 25 | 27 | 29 | 31 | 33 | 35 | m |
| ♣/♣ | 8000 | 7480 | 6390 | 5560 | 4900 | 4370 | 3940 | 3570 | 3260 | 2990 | 2760 | 2550 | kg |



| | | | | | | | | |
|-------|-----|------|------|------|------|------|------|----|
| 35m → | 3,5 | 25,7 | 27 | 29 | 31 | 33 | 35 | m |
| ♣ | | 4000 | 3770 | 3460 | 3190 | 2960 | 2750 | kg |

| | | | | | | | | | | |
|-------|------|------|------|------|------|------|------|------|------|----|
| 3,5 → | 15,3 | 17 | 19 | 21 | 23 | 25 | 27 | 29 | 31 | m |
| ♣/♣ | 8000 | 6990 | 6090 | 5380 | 4800 | 4330 | 3930 | 3590 | 3300 | kg |




| | | | | | | |
|-------|-----|------|------|------|------|----|
| 31m → | 3,5 | 27,7 | 29 | 30 | 31 | m |
| ♣ | | 4000 | 3790 | 3640 | 3500 | kg |


122 ton·meter loopkatkraan op rupsonderstel

Potain GTMR 366 A

Opgetopt

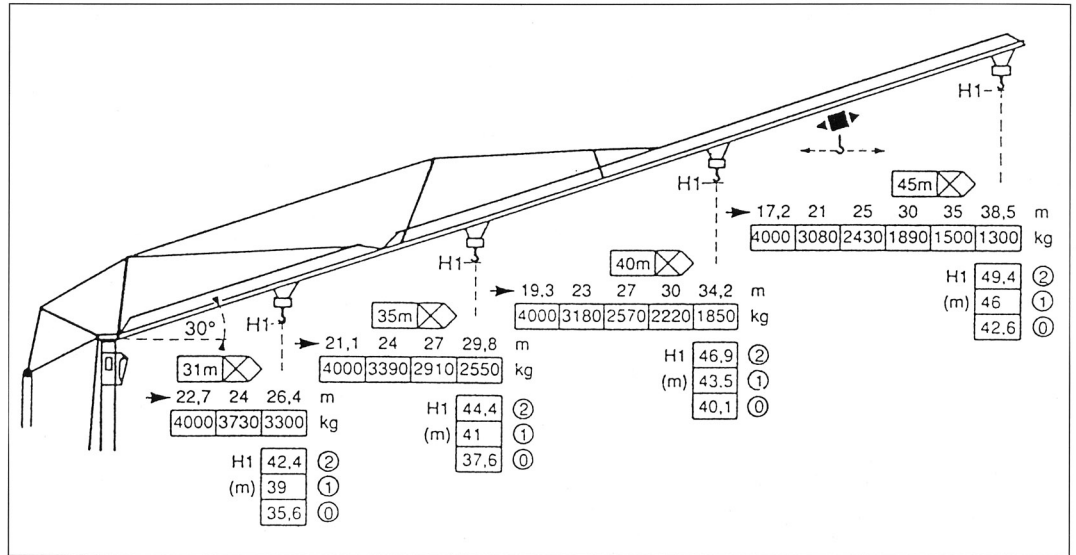

Opmerking:
Rijden met of zonder last,
afhankelijk van de uitvoe-
ring

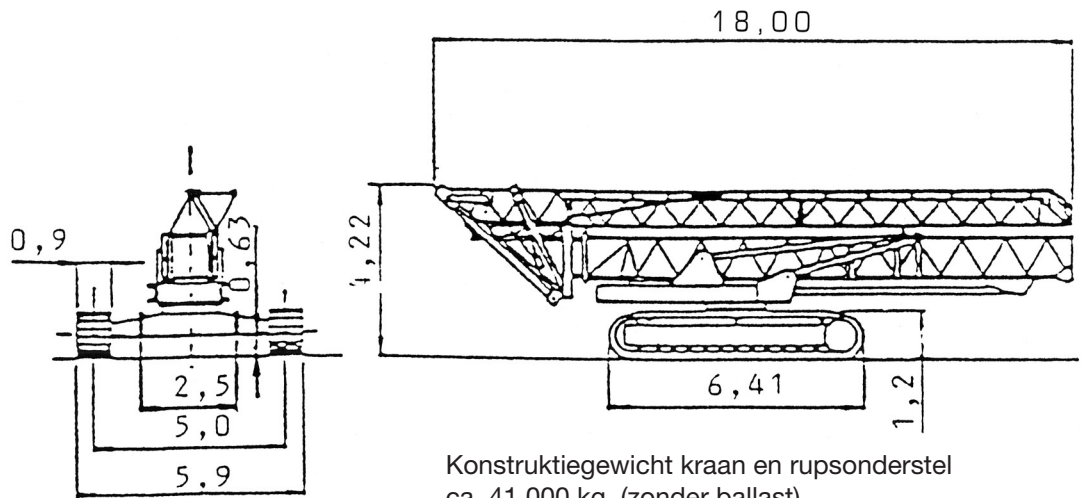

Konstruktiegewicht kraan en rupsonderstel
ca. 41.000 kg. (zonder ballast)